




**PRONTEAU tap features:**


- Stylish 3 way mixer tap delivering domestic hot, cold and heated 98° (variable selctable) filtered water
- The dual stage handle mechanism on the hot handle has been designed with safety and ease of use in mind
- 360 degree rotation of spout allows for easy use and accessibility
- Features an energy saving cold start valve as standard
- Scale inhibiting filter cartridge included
- 5 Year Warranty\*
- WRAS approved

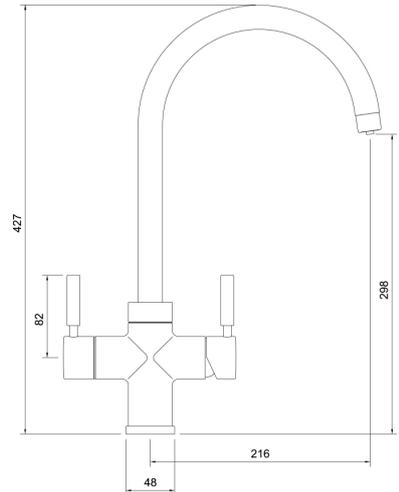

- **Overall Height / projection:** 427 mm
- **Exit spout reach:** 216 mm
- **Exit spout height:** 298 mm
- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø35 mm
- **Max. surface installation depth:** 50 mm
- Cold start valve allows installation close to backsplashes (handles do not rotate backwards)

Model Name: Prostyle / Prostream / Protex - 3 in 1 - hot water monobloc

	Dynamic working pressure (bar)															
	0.1	0.2	0.3	0.4	0.5	0.75	1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	15.0
Hot water	1.34	1.50	1.63	1.74	1.84	2.00	2.20	2.38	2.55	2.70	2.85	2.98	3.10	3.20	3.30	3.40
Cold water	0.80	1.04	1.23	1.41	1.56	1.74	1.90	2.07	2.23	2.37	2.50	2.60	2.70	2.80	2.90	3.00
Hot water - with filter	1.30	1.46	1.60	1.71	1.80	1.95	2.10	2.25	2.40	2.55	2.68	2.80	2.90	3.00	3.10	3.20
Hot water - with filter - with boiler (Boiler at 85°)	0.80	0.92	0.96	0.98	0.99	0.99	1.00	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01

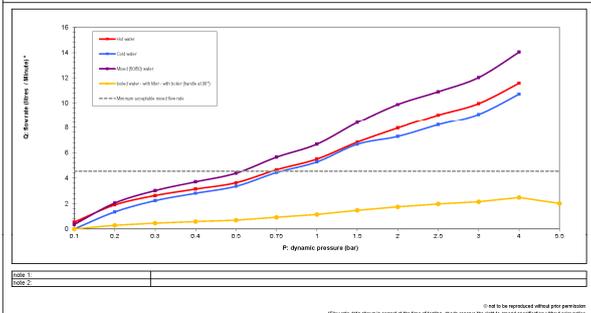

**PRONTEAU flow information and connectivity:**

- **Min cold water pressure requirement:** 1.5 bar
- **Min hot water pressure requirement:** 0.75 bar
- **Recommended / Maximum (domestic) hot water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres/min):** 12.02
- **Control valve type:** 1 x 1/2" Ceramic disc QT, 1 x Single lever 35mm
- **Product flow characteristics:** (H&C/Boiling) dual flow
- **Hot and Cold inlets:** Flexible hose connections supplied
- **Non return valve(s):** Yes, integral to cold inlet flexi hose only

**Care instructions and Warranty Summary\***


- Clean the tap regularly as required, using a mild soap and damp cloth, do not use any other cleaners, regular cleaning will prevent the build-up of lime scale and dirt
- Maintain the heater according to the user guide, for example replace filter and descale when required.
- Mixertap materials and workmanship defects warranted for 5 years
- Proboil2X materials and workmanship defects warranted for 2 years
- Mixertap valves and working parts warranted for 5 years
- Surface finish warranty defects warranted for 1 year
- All o-rings, hoses & gaskets warranted for 1 year



#### PROBOIL.2X features:

- Controllable tank temperature range from 75°C (holiday/eco mode) to 85,90,95,96, 97, 98°C using the touch screen controls.
- 2.1 Litre capacity tank, apx. 7 minutes reboil after use
- On screen filter life / replacement indicator
- Intelligent self-diagnostic control
- No external drain connection needed for a simplified and more flexible installation
- Flow limited to 2 litres/min to limit splashing and ensure a smooth flow
- Tool free, hand tight connectors to speed up installation, maintenance and descaling
- Compact size 22x22x28cm
- 2 Year Warranty\*
- WRAS approval pending

All temperatures quoted are measured within the tank of the boiler and actual spout exit temperature may vary dependant on local conditions and tap model.

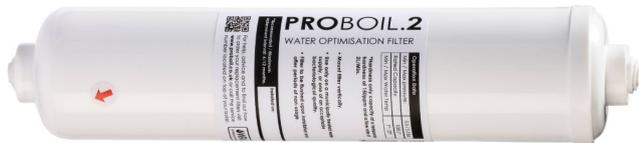

#### PROBOIL.2 filter features:

- Filtered 98°C drinking water, engineered specifically for hot water applications
- Included with every PROBOIL.2X system
- Recommended replacement interval 6 months
- Chlorine taste and odour reduction
- Scale reduction for better drinks and tank protection
- WRAS approved



#### The complete package:

Each PRONTEAU system includes:

- A stylish choice of PRONTEAU mixer taps
- PROBOIL.2X hot water boiler
- PROBOIL.2 scale control filter & assembly
- Comprehensive user and installation guide
- Nationwide professional maintenance and service support