


COASTLINE ALASSIO Swing Door

Installation & Maintenance Instructions

Rev 01.16

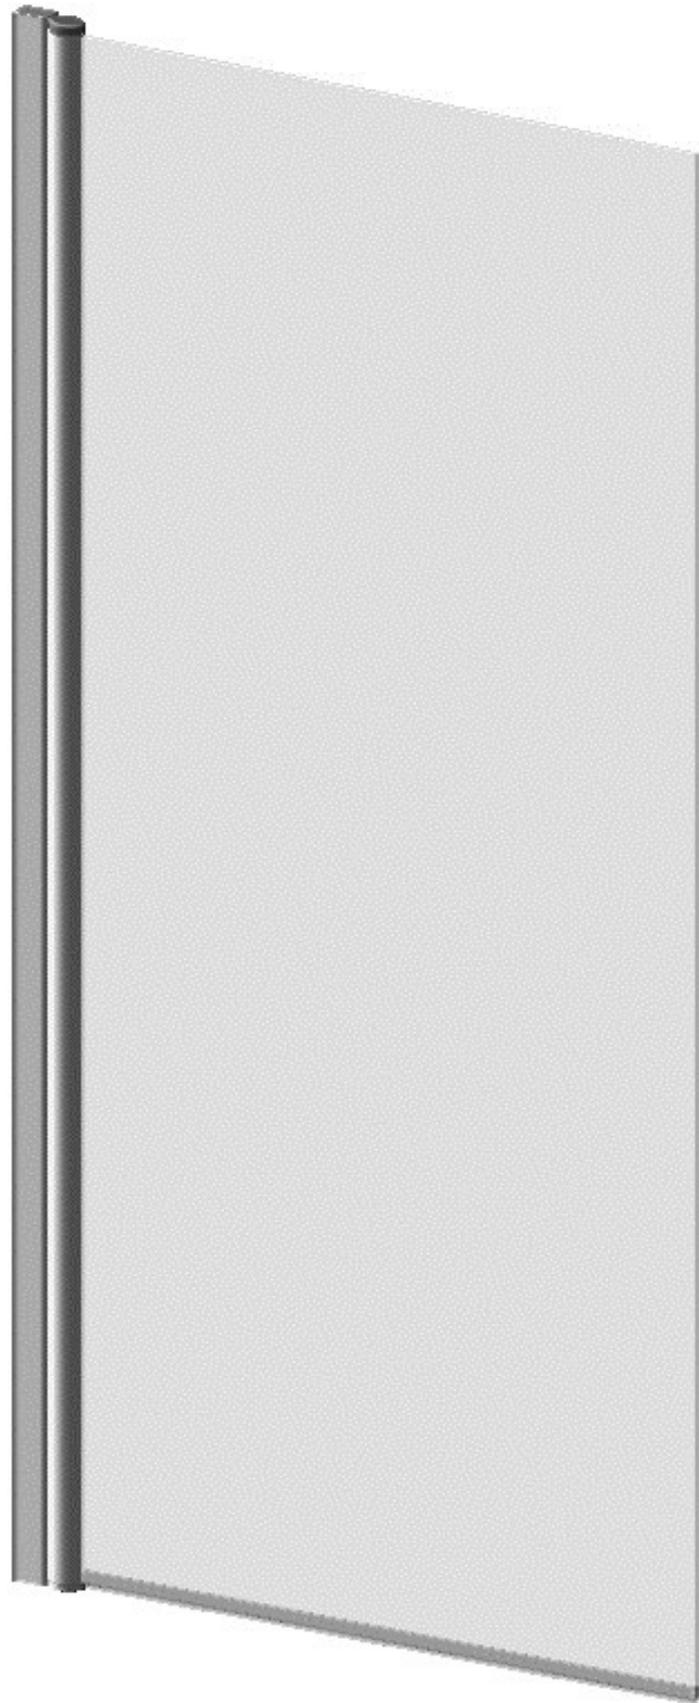

Lakes
Bathrooms

IMPORTANT NOTES :

Please Read Carefully & retain these instructions for Future Reference.

1. For ease & safety we advise that two persons assemble this product.
2. Protect shower tray surfaces at all times.
3. Exposed glass corners / edges MUST NOT contact hard surfaces at any time.
4. Check for cables, pipes etc before drilling walls.
5. Ensure all surfaces are dry, clean & free of loose debris / dust.
6. Unpack goods with care (small parts can become lodged in packaging & inadvertently discarded). Check parts supplied against parts & fittings listed herein. Damaged parts / omissions may be resolved by calling Lakes Bathrooms Helpline.
7. Whilst precautions are taken in manufacture, care must be taken when handling as rail ends may have sharp edges.
8. Before commencing, check :
 - a) shower tray (if used) is level & completely sealed to finished / tiled walls.
 - b) finished walls are sound & free of cracks, loose tiles / grout.
8. AFTER INSTALLATION, DO NOT 'WET' ENCLOSURE FOR 48 HOURS TO ENSURE FULL CURE OF SILICONE SEALANT.

USE :

General Care & Maintenance.

Provided this product is installed & operated in accordance with these instructions, problems should not arise. However should maintenance be required it should be carried out by a competent person with reference to these instructions. Before any work is carried out the root cause of the problem must be identified. Lakes Bathrooms service engineers are available if necessary to consult / carry out remedial work. Call Lakes Bathrooms HELPLINE.

Cleaning.

(Every one to two weeks depending on local water {hardness} conditions).

All glass panels in this product have a hydrophobic coating aiding 'runoff' of water droplets, reducing the need for frequent cleaning. For best appearance / product life however, regular cleaning is recommended.

Use ONLY mild soap / detergent solutions to clean. Rinse with water, squeegee glass panels & wipe frames dry with a soft cloth. Under no circumstances should abrasive, caustic or scouring products be used. Cleaning products should have pH value 4 ~ 8. DO NOT use 'spray & leave' type cleaning products. Non compliance with these cleaning instructions may cause decorative finishes to deteriorate & could adversely affect safe operation of the enclosure.

Limescale ~ should a build up of limescale occur, remove using a 50:50 solution of white vinegar & water applied with a soft cloth & rinsed / dried thoroughly afterwards.

Daily Care.

To prevent the build up of limescale, do not allow water droplets to dry on glass or frames. After showering, rinse with water, remove droplets from glass with a squeegee & wipe frame with a soft cloth.

Customer Service.

Quality Guarantee : Lakes Bathrooms Ltd guarantee Shower Doors & Enclosures against any manufacturing or material defects for the lifetime of the product. We will resolve defects free of charge by repairing / replacing parts as we feel necessary. To be 'free of charge' service work must be carried out by Lakes Bathrooms or approved agents.


Not Covered by this Guarantee : Damage or defects that result from improper installation, improper use, or lack of maintenance (including limescale buildup). Damage or defects that result from repairs / modifications undertaken by unauthorized persons. This guarantee is in addition to statutory & other legal rights.

What to do if something goes wrong : Should the product not function correctly on initial use, firstly, contact the installer to check that unit installation & commissioning are in accordance with these instructions. Should this not resolve difficulties or should performance decline, consult 'Troubleshooting' section to see if simple home maintenance is needed. Alternatively our HELPLINE staff can assist, or if necessary arrange for a service engineer to visit.

Spares : We maintain extensive spare part stocks. Spares can be ordered / purchased from your retailer in the first instance. Parts will normally be dispatched within two working days from order placement. Pro Forma invoices will be sent for cheque payments.

SUPPLIED PARTS:

Screen Sub Assembly
Comprising:*

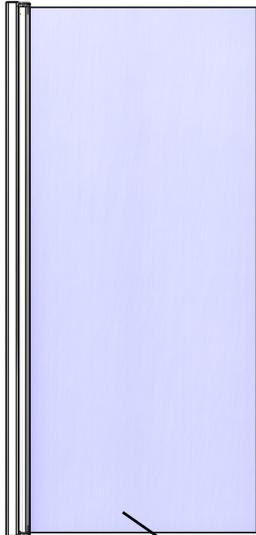


Screen Glass



Hinge Profile (Bonded to screen) glass)




Hinge Rail (LK850-002)




Top Hinge Bracket (SS10-006)



Bottom Hinge Bracket (SS10-005)



Hinge Bearing (SS10-012) x2




2x Hinge Seal (LK850-006)



M4 x 30 Long Pan Head Pozidriv Screw x4

* Part numbers in brackets




Wall Rail (LK850-001)



5mm x 60mm Countersunk Self Tapping Screw (3x)



Glass Support



Bottom Seal (LK850-31)




8mm x 50mm Wall Plug (3x)



1mm Basepad for Glass Support



Outer End Cap (Handed Pair)



Wall Rail Top Cap (Handed Pair)



Inner End Cap (Handed Pair)



Screw Cover Cap (3x)




3.5mm x 10mm Self tapping Pan Head Screw (3x)



Cup Washer (3x)

Door Size	Adjustment Range (A) (mm)
LK850-070	675—700
LK850-080	775—800
LK850-090	875—900
LK850-100	975—1000

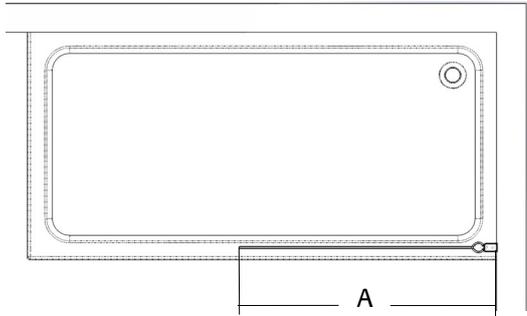


Lakes Alassio shower screen is fully reversible for fitting to a suitable shower tray or wet room.

Ensure shower tray is level and that tray to wall joints are sealed & cured over entire length of bath sides (see Fig A) prior to fitting screen.

DO NOT SEAL TRAY EDGES UP TO A FITTED SCREEN!

Tools Required

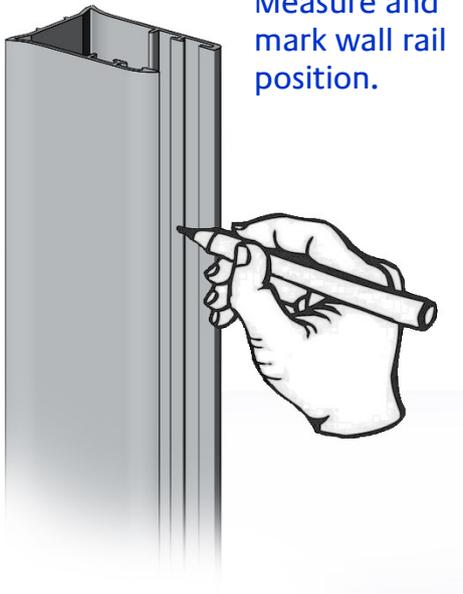

Measure and mark wall rail position.

A

Ensure continuous silicone sealant bead as indicated before fitting wall rail.

For best performance screen must be fitted adjacent to the inside edge of the tray rim to ensure maximum effectiveness of the bottom seal.

Wall rail orientation:


Cross holes to inside (curved face facing out.)


Mark fixing hole position.

Drill with 8mm bit then insert wall plug.

Secure using 5mm x 60mm screws.


(Back face may be siliconed before mounting.)

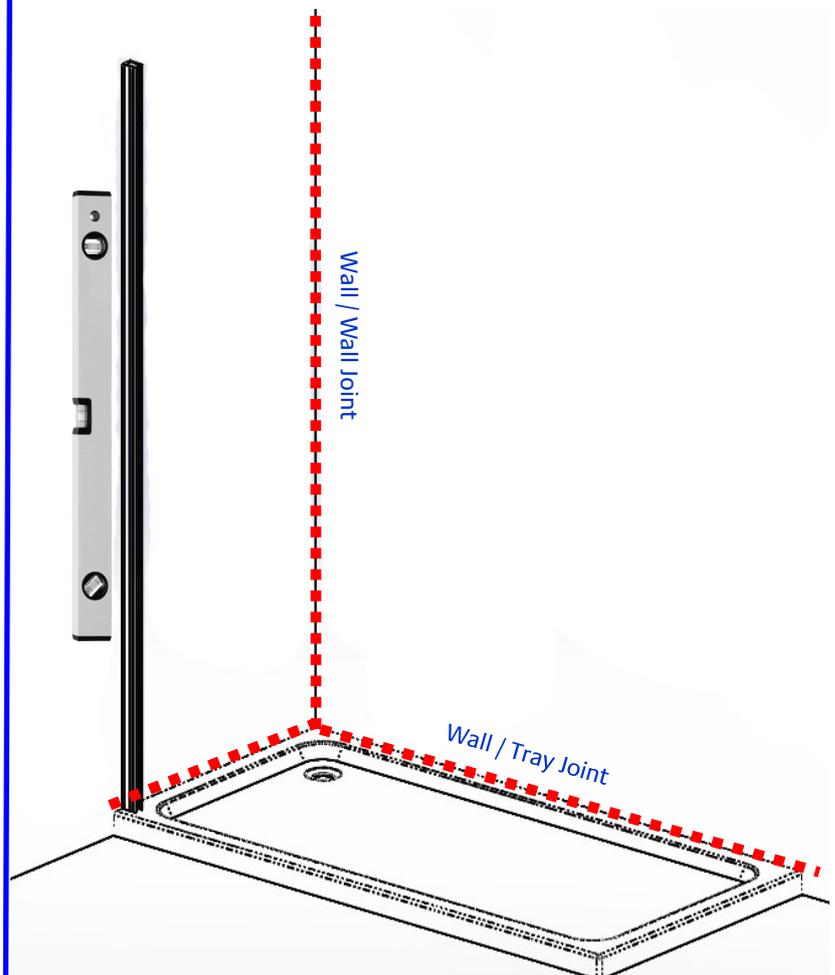

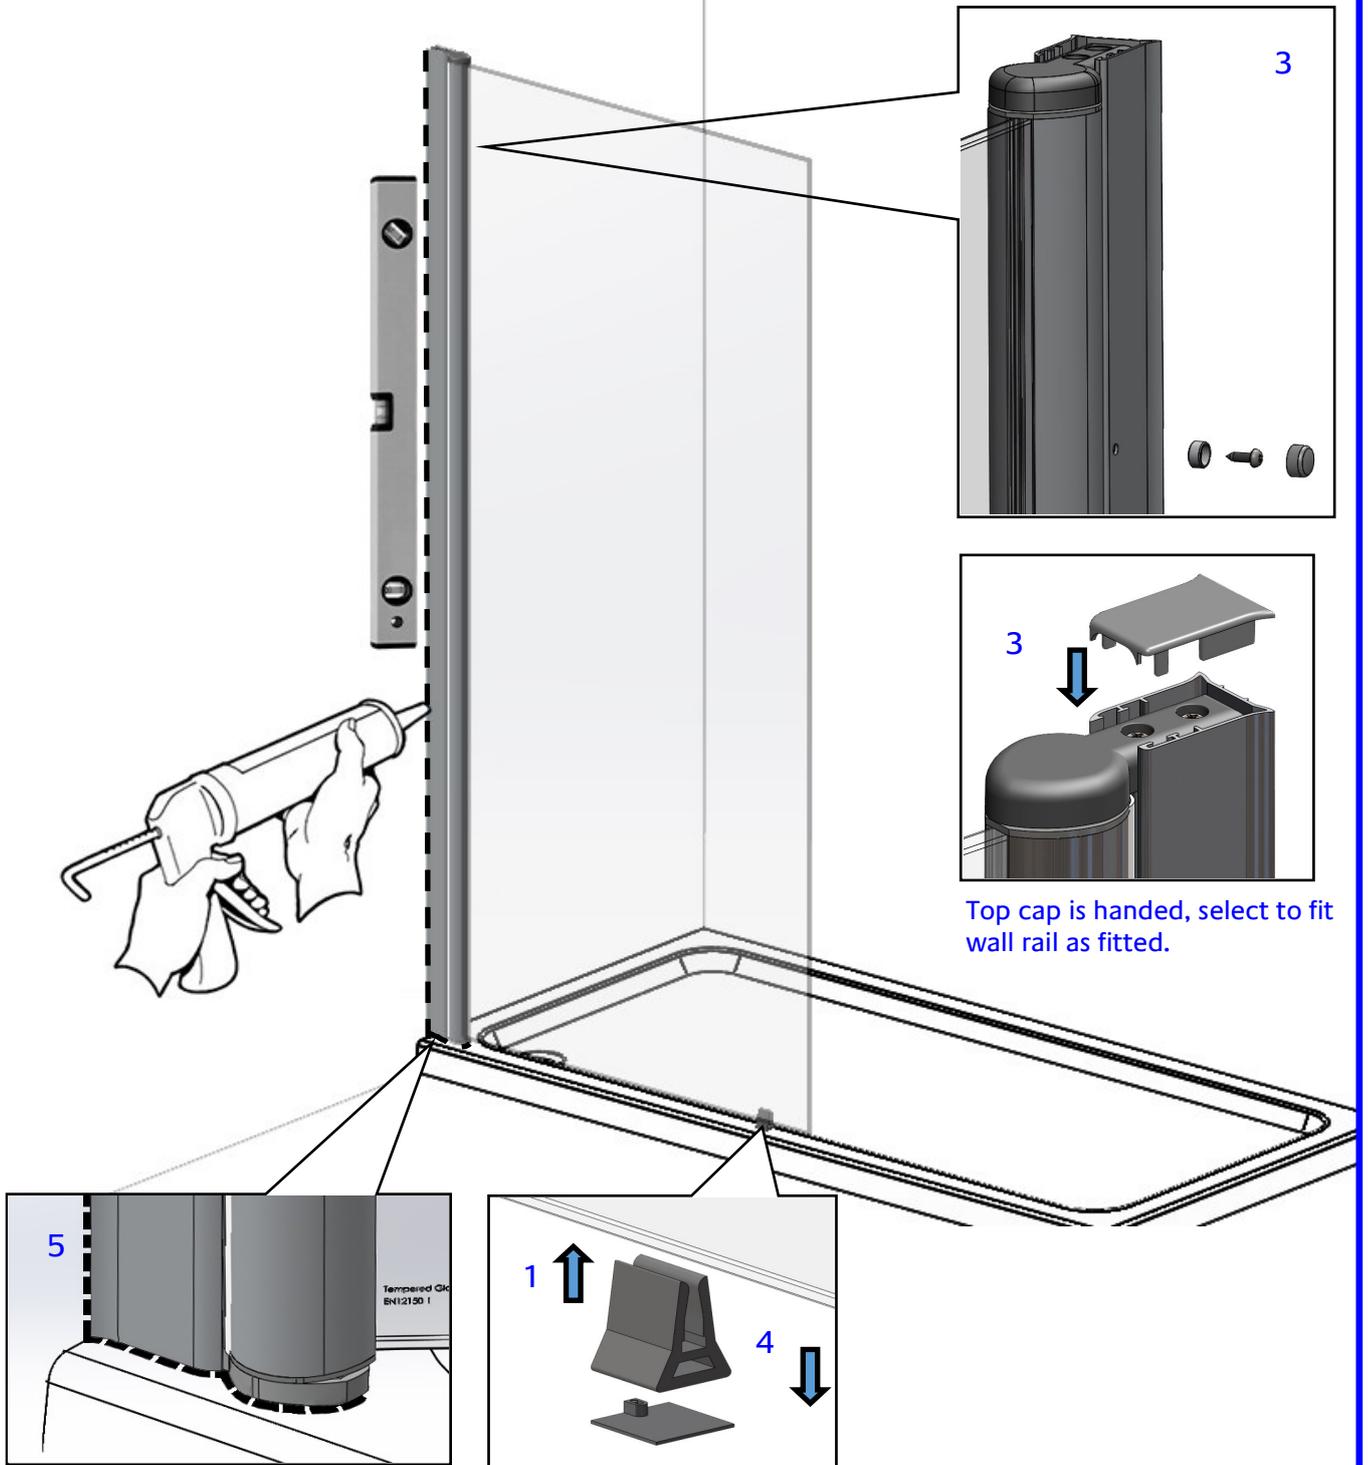

Top cap is handed, select to fit wall rail as fitted.

1. Push basepad & glass support onto bottom edge of glass towards the outer edge of the screen
2. Carefully lift screen into position and push into wall profile. Ensure bottom hinge bracket is sitting on the tray rim or wet room floor.
3. From inside the screen using wall rail holes as guides, drill with the 3mm bit. Fit washer & screw screen to wall rail using 3.5mm x 10mm screw. Push on screw cover cap & fit wall rail top cap
4. Once secure, move screen inwards over tray, remove glass support & fit bottom seal (Fig. X)
5. With Screen still pushed inwards, apply continuous bead of silicone as shown. EXTERNALLY ONLY

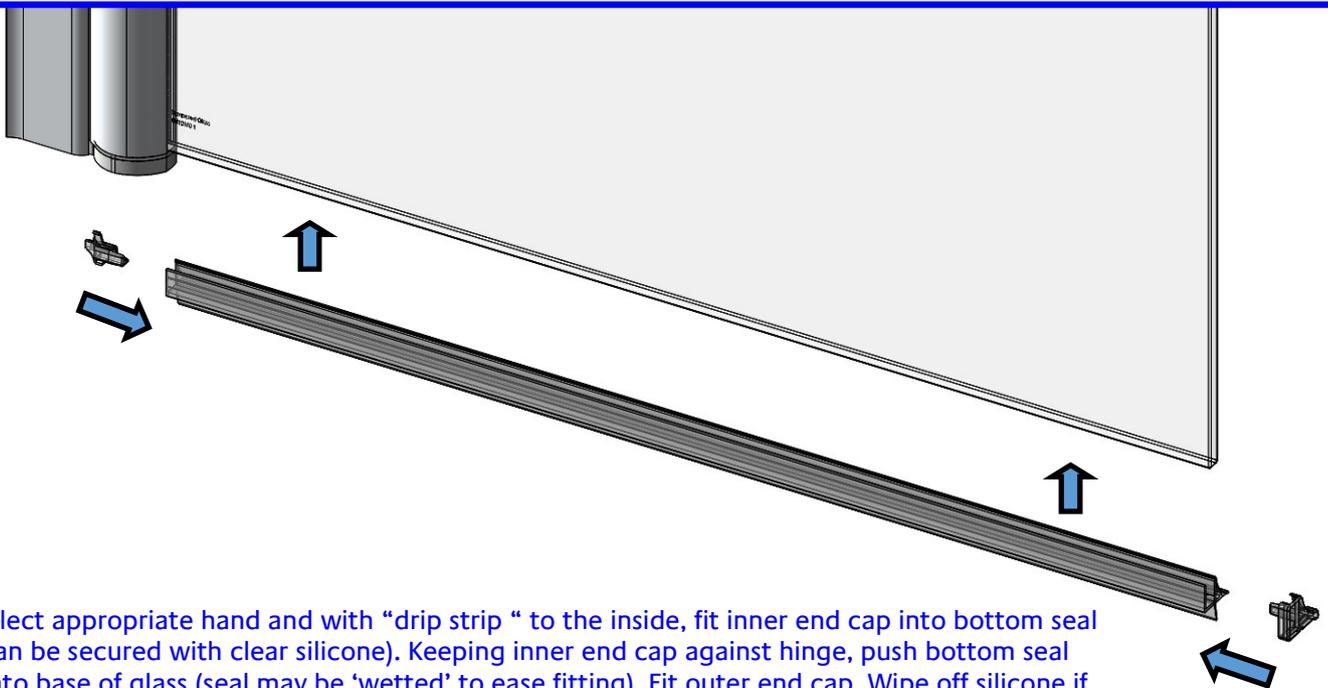

Select appropriate hand and with “drip strip “ to the inside, fit inner end cap into bottom seal (can be secured with clear silicone). Keeping inner end cap against hinge, push bottom seal onto base of glass (seal may be ‘wetted’ to ease fitting). Fit outer end cap. Wipe off silicone if this has been used with a damp cloth or alcohol wipe.

BASIC TROUBLESHOOTING :

Screen hinges noisy / not moving smoothly : Apply sanitary silicone based grease to hinge bearing inner diameters. Check that hinge seals are not distorted or trapped in gap between profiles.

Leakage in area of bottom hinge : ensure bottom seal is pushed fully up to bottom hinge.

Leakage : The sealing method described in these instructions relies on a continuous seal between walls & shower tray before installing the screen. In the unlikely event of a screen leak, water will be visible on the outside of the screen itself or around the perimeter silicone seal ONLY. Water / moisture appearing outside this area (ie at floor level or under shower tray) is normally due to incorrect tray / screen sealing.

Lakes Bathrooms Ltd.

Alexandra Way,
Ashchurch,
Tewkesbury,
Gloucestershire
GL20 8NB

Service : England, Scotland, Wales

8.30am—5pm Mon ~ Thurs

8.30am—4.30pm Fri

Tel / HELPLINE : 01684 853870

Fax : 01684 857411

www.lakesbathrooms.co.uk

Email : admin@lakesbathrooms.co.uk

Service : Northern Ireland

Ian A Kernohan

Firtrees

Green Way Industrial Estate

Conlig

Northern Ireland

BT23 7SU

8.30am—5pm Mon ~ Thurs

8.30am—4.30pm Fri